

CC-3 Conduction Cooled Capacitors

CC-3 series conduction cooled capacitors are available in Fibre Glass tubes end filled with epoxy resin and copper flange terminals

Specifications:

Specifications:

Capacitance	: 3 μ F to 65 μ F
Tolerance	: $\pm 10\%$
Rated Voltage	: upto 1200Vrms
Dielectric	: Metallised Polypropylene Film
Max current	: upto 1200 Arms
Working frequency	: upto 60kHz
Temperature Range	: -40°C to +85°C
Standard reference	: IEC 61071

Marking

ADVANCE Value , Tolerance Voltage ,
Current Part Code
Mysore – India
DISCHARGE BEFORE HANDLING





Mfrs. of PLASTIC FILM CAPACITORS & EMI NOISE FILTERS

Registered Office & Factory :

3A-3A/1, Belavadi Indl Area, Mysore - 570 018. INDIA



ISO 9001 : 2015
ISO 13485 : 2016


Phone : +91 821 2402307, 2402301, 2403058

E-mail : enquiries@advancecapacitors.com
advcaps@gmail.com

Website : www.advance-capacitors.com

GSTIN : 29AABCA1720D1ZA

Dimensional Drawing: All Dimensions are in mm , Not to scale

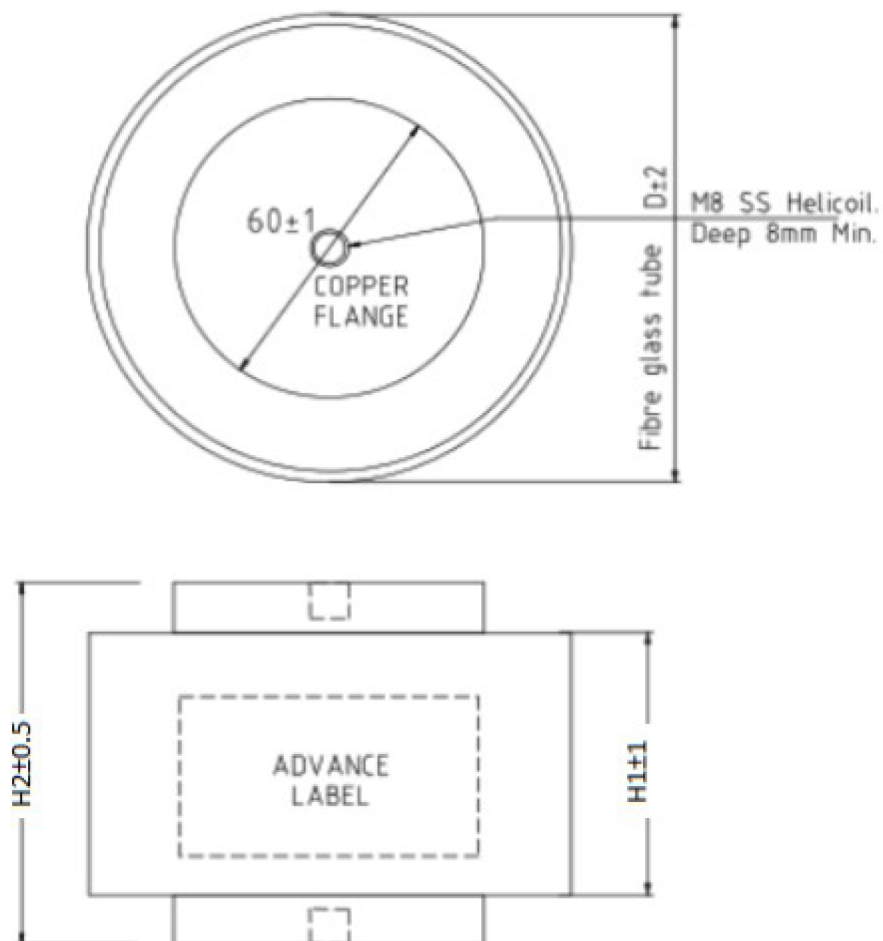



ADVANCE COMPONENTS AND INSTRUMENTS PVT. LTD.

Mfrs. of PLASTIC FILM CAPACITORS & EMI NOISE FILTERS

Registered Office & Factory :

3A-3A/1, Belavadi Indl Area, Mysore - 570 018. INDIA



ISO 9001 : 2015
ISO 13485 : 2016

Phone : +91 821 2402307, 2402301, 2403058

E-mail : enquiries@advancecapacitors.com
advcaps@gmail.com

Website : www.advance-capacitors.com

GSTIN : 29AABCA1720D1ZA

Standard Capacitor Range

Capacitance	Tolerance	Rated RMS Voltage	Max. Current	Max. Power	Working Frequency	Dimensions in mm		
μF @ 1kHz	%	Vrms	Irms	kvar	kHz	D ± 2	H1 ± 1	H2 ± 0.5
65	± 10	400	1200	500	7	130	66	77.5
60	± 10	500	1200	600	7	130	52	71.5
45.0	± 10	500	1000	500	7	107	66	77.5
40.0	± 10	700	600	400	3.3	130	66	77.5
37.0	± 10	500	1000	500	7	102	66	77.5
30.0	± 10	700	600	400	4.5	107	66	77.5
25.0	± 10	500	1000	500	13	107	52	71.5
22.0	± 10	400	1000	400	18.5	102	52	71.5
21.0	± 10	500	1000	500	15.5	102	52	71.5
19.0	± 10	600	1200	700	16.5	107	52	71.5
14.0	± 10	700	1000	700	16	107	52	71.5
10.0	± 10	700	1000	700	23	90	52	71.5
5.0	± 10	700	1000	700	46	90	52	71.5
3.0	± 10	750	850	600	60	80	52	71.5
4.0	± 10	900	700	600	30	98	52	71.5
8.5	± 10	900	1000	900	21	98	52	71.5
3.0	± 10	1200	700	800	31	90	52	71.5