

CC-3 Conduction Cooled Capacitors

CC-3 series conduction cooled capacitors are available in Fibre Glass tubes end filled with epoxy resin and copper flange terminals

Specifications:

Capacitance	: 3 μ F to 22 μ F
Tolerance	: \pm 10%
Rated Voltage	: upto 1200Vrms
Dielectric	: Metallised Polypropylene Film
Max current	: upto 1000 Arms
Working frequency	: upto 50kHz
Temperature Range	: -40°C to +85°C
Standard reference	: IEC 61071

Marking

ADVANCE Value , Tolerance Voltage ,
Current Part Code
Mysore - India
DISCHARGE BEFORE HANDLING



**ADVANCE COMPONENTS
AND INSTRUMENTS PVT. LTD.**

Mfrs. of PLASTIC FILM CAPACITORS & EMI NOISE FILTERS

Registered Office & Factory :
3A-3A/1, Belavadi Indl.Area, Mysore - 570 018. INDIA



ISO 9001 : 2015
ISO 13485 : 2016



Phone : +91 821 2402307, 2402301, 2403058

E-mail : enquiries@advancecapacitors.com
advcaps@gmail.com

Website : www.advance-capacitors.com

GSTIN : 29AABCA1720D1ZA

Dimensional Drawing: All Dimensions are in mm , Not to scale

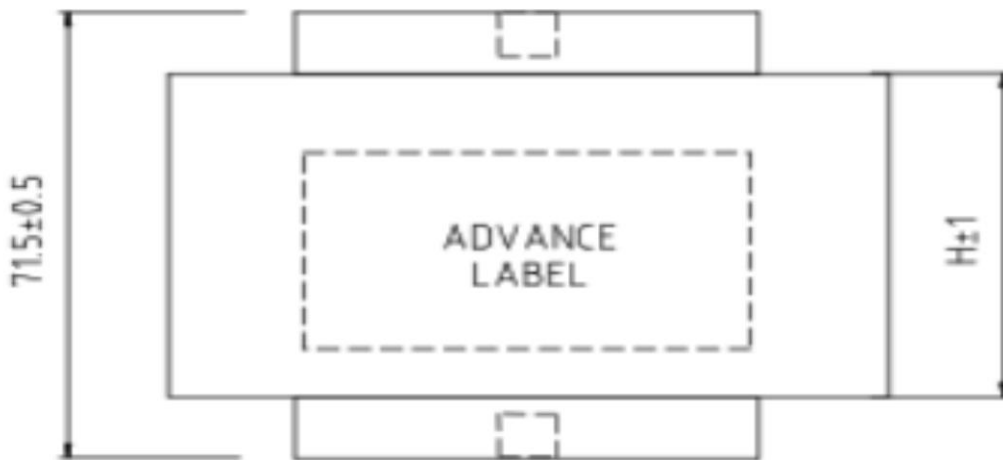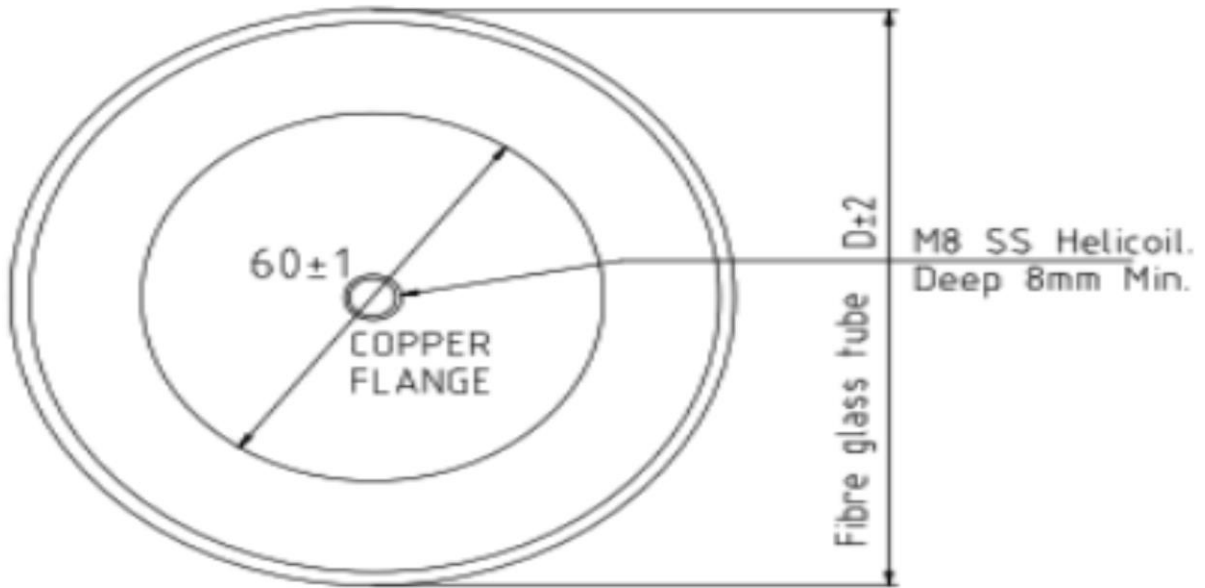

ALL DIMENSIONS ARE IN MM



ADVANCE COMPONENTS AND INSTRUMENTS PVT. LTD.

Mfrs. of PLASTIC FILM CAPACITORS & EMI NOISE FILTERS

Registered Office & Factory :
3A-3A/1, Belavadi Indl Area, Mysore - 570 018. INDIA



ISO 9001 : 2015
ISO 13485 : 2016

Phone : +91 821 2402307, 2402301, 2403058

E-mail : enquiries@advancecapacitors.com
advcaps@gmail.com

Website : www.advance-capacitors.com

GSTIN : 29AABCA1720D1ZA

Standard Capacitor Range: (Capacitors according to Customer specifications are also manufactured)

Capacitance	Tolerance	Rated RMS Voltage	Max. Current	Max. Power	Working Frequency	Dimensions in mm	
μF @ 1kHz	%	Vrms	Irms	kvar	kHz	D \pm 2	H \pm 1
22.0	\pm 10	400	1000	400	18.5	102	52
21.0	\pm 10	500	1000	500	15.5	102	52
5.0	\pm 10	700	1000	700	46	90	52
10.0	\pm 10	700	1000	700	23	90	52
3.0	\pm 10	750	850	638	60	80	52
4.0	\pm 10	900	700	630	44.5	98	52
8.5	\pm 10	900	1000	900	21	98	52
3.0	\pm 10	1200	700	840	31	90	52

Note: Customer specific Capacitance, Voltage rating and current rating can be manufactured according to requirement