


Advance Metallised Polyester Capacitors

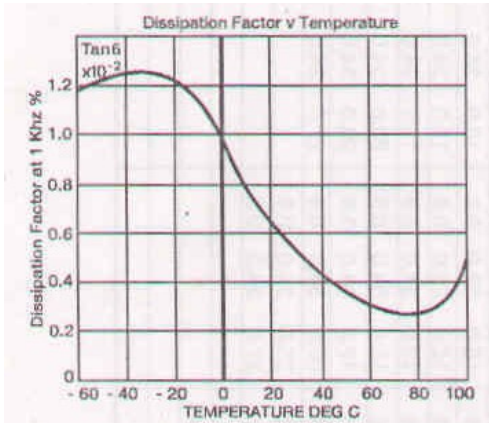

GENERAL :

- Non-Polar
- Non-Inductive
- Self-Healing
- Higher Capacitance/ Voltage on request
- Epoxy Resin Sealed
- Humidity, Shock, Vibration Proof
- Tin-Electroplated Lead

APPLICATIONS:

- Instrumentation
- Communications
- R-C Circuits
- Input to High Impedance Circuits
- Replacement for Paper Capacitors
- Meter Damping
- Filter, Bypass
- Computers, Switching

STYLES :

- Type- MWF - Cylindrical, Tape Wrap, Epoxy End Fill, Axial Lead
- Type – MF - Rectangular, Plastic Case, Epoxy Fill, Radial Lead
- Type- MMWF -Miniature Cylindrical, Tape Wrap, Epoxy End Fill, Axial Lead
- Type –MMF – Miniature Rectangular, Plastic Case, Epoxy Fill, Radial Lead
- Type – MWOV - Oval Shape, Tape Wrap, Axial Lead
- Type- MMMF – Miniature Rectangular, Radial lead, 5mm pitch

STANDARDS:

JSS 50204 MIL-C-27287 BS 2011 IEC 384-2 IS 9256

SPECIFICATIONS:

All measurements are made at 20°C

Capacitance and Tan Delta are measured at 1kHz.

Temperature Range : -55°C + 125°C

Power Factor (Tan delta) : ≤ 0.008 (Typical 0.006)

Insulation Resistance : Capacitance ≤ 0.33μF > 30000 MΩ*μF

Capacitance > 0.33μF > 10000 MΩ*μF second

Test Voltage : 1.6 x rated dc voltage

Climatic Category : 55/125/56



Voltage derating : 1.5% per °C for use above 85 °C

Soldering : 5 Seconds at 250 °C

Tolerance : ±20%, ±10%, ±5%

Closer Tolerance available on request

Metallised Polyphenylene Sulphide or Metallised Polypropylene is recommended for Closer Tolerance

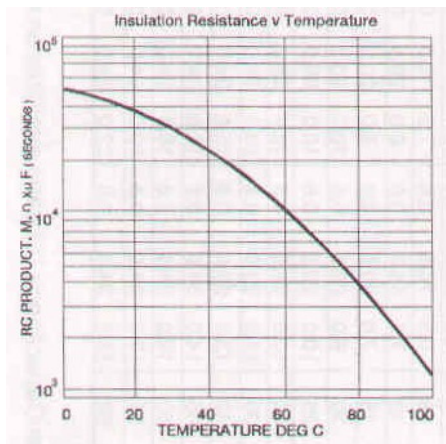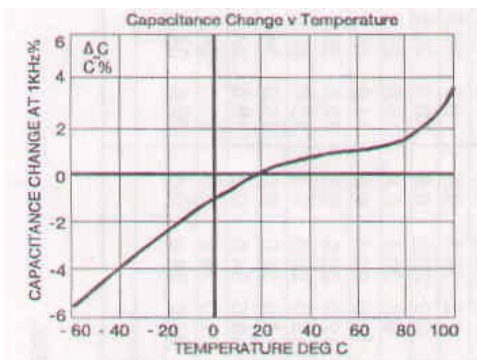


METALLISED POLYESTER CAPACITORS - JSS 50204 CPM 07

Type MWF : Cylindrical Wrap / Epoxy Fill, Axial Lead

These capacitors are cylindrical and are provided with yellow thermosetting tape outer wrap.

The ends are sealed with epoxy resin. These capacitors conform to JSS 50204 CPM 07

Dimensions (Max) in mm

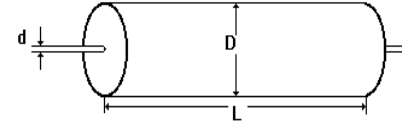


| Voltage | WD / 63 VDC | | | WH / 100 VDC | | | WR / 160 VDC | | | WG / 250 VDC | | | WW/ 400 VDC | | | WK / 630 VDC | | | WX / 1000 VDC | | |
|---------|-------------|------|-----|--------------|------|-----|--------------|------|-----|--------------|------|-----|-------------|------|-----|--------------|------|-----|---------------|------|-----|
| | D | L | d | D | L | d | D | L | d | D | L | d | D | L | d | D | L | d | D | L | d |
| 0.0010 | 6.5 | 11 | 0.6 | 6.5 | 11 | 0.6 | 6.5 | 11 | 0.6 | 6.5 | 11 | 0.6 | 6.5 | 11 | 0.6 | 6.5 | 11 | 0.6 | 6.5 | 11 | 0.6 |
| 0.0015 | 6.5 | 11 | 0.6 | 6.5 | 11 | 0.6 | 6.5 | 11 | 0.6 | 6.5 | 11 | 0.6 | 6.5 | 11 | 0.6 | 6.5 | 11 | 0.6 | 6.5 | 11 | 0.6 |
| 0.0022 | 6.5 | 11 | 0.6 | 6.5 | 11 | 0.6 | 6.5 | 11 | 0.6 | 6.5 | 11 | 0.6 | 6.5 | 11 | 0.6 | 6.5 | 11 | 0.6 | 6.5 | 11 | 0.6 |
| 0.0033 | 6.5 | 11 | 0.6 | 6.5 | 11 | 0.6 | 6.5 | 11 | 0.6 | 6.5 | 11 | 0.6 | 6.5 | 11 | 0.6 | 6.5 | 11 | 0.6 | 6.5 | 11 | 0.6 |
| 0.0047 | 6.5 | 11 | 0.6 | 6.5 | 11 | 0.6 | 6.5 | 11 | 0.6 | 6.5 | 11 | 0.6 | 6.5 | 11 | 0.6 | 6.5 | 11 | 0.6 | 6.5 | 11 | 0.6 |
| 0.0068 | 6.5 | 11 | 0.6 | 6.5 | 11 | 0.6 | 6.5 | 11 | 0.6 | 6.5 | 11 | 0.6 | 6.5 | 11 | 0.6 | 6.5 | 11 | 0.6 | 6.5 | 11 | 0.6 |
| 0.0100 | 6.5 | 16.5 | 0.6 | 6.5 | 16.5 | 0.6 | 6.5 | 16.5 | 0.6 | 6.5 | 16.5 | 0.6 | 6.5 | 16.5 | 0.6 | 6.5 | 16.5 | 0.6 | 9.0 | 20.5 | 0.8 |
| 0.0150 | 6.5 | 16.5 | 0.6 | 6.5 | 16.5 | 0.6 | 6.5 | 16.5 | 0.6 | 6.5 | 16.5 | 0.6 | 6.5 | 16.5 | 0.6 | 6.5 | 16.5 | 0.6 | 10.0 | 20.5 | 0.8 |
| 0.0220 | 6.5 | 16.5 | 0.6 | 6.5 | 16.5 | 0.6 | 6.5 | 16.5 | 0.6 | 6.5 | 16.5 | 0.6 | 6.5 | 16.5 | 0.6 | 7.5 | 16.5 | 0.6 | 10.0 | 20.5 | 0.8 |
| 0.0330 | 6.5 | 16.5 | 0.6 | 6.5 | 16.5 | 0.6 | 6.5 | 16.5 | 0.6 | 6.5 | 16.5 | 0.6 | 6.5 | 16.5 | 0.6 | 8.0 | 20.5 | 0.6 | 12.0 | 20.5 | 0.8 |
| 0.0470 | 6.5 | 16.5 | 0.6 | 6.5 | 16.5 | 0.6 | 6.5 | 16.5 | 0.6 | 6.5 | 16.5 | 0.6 | 7.5 | 16.5 | 0.6 | 8.0 | 20.5 | 0.6 | 12.0 | 20.5 | 0.8 |
| 0.0680 | 6.5 | 16.5 | 0.6 | 6.5 | 16.5 | 0.6 | 6.5 | 16.5 | 0.6 | 6.5 | 16.5 | 0.6 | 7.5 | 20.5 | 0.6 | 12.0 | 20.5 | 0.8 | 12.0 | 29.0 | 0.8 |
| 0.1000 | 6.5 | 16.5 | 0.6 | 6.5 | 16.5 | 0.6 | 6.5 | 16.5 | 0.6 | 6.5 | 16.5 | 0.6 | 8.0 | 20.5 | 0.6 | 9.5 | 20.5 | 0.8 | 13.0 | 29.0 | 0.8 |
| 0.1500 | 6.5 | 16.5 | 0.6 | 6.5 | 16.5 | 0.6 | 6.5 | 16.5 | 0.6 | 7.5 | 16.5 | 0.6 | 9.0 | 20.5 | 0.8 | 10.0 | 29.0 | 0.8 | 16.0 | 34.0 | 0.8 |
| 0.2200 | 6.5 | 16.5 | 0.6 | 7.5 | 16.5 | 0.6 | 7.5 | 16.5 | 0.6 | 7.5 | 16.5 | 0.6 | 9.0 | 29.0 | 0.8 | 12.0 | 29.0 | 0.8 | 18.0 | 34.0 | 0.8 |
| 0.3300 | 6.5 | 16.5 | 0.6 | 7.5 | 16.5 | 0.6 | 7.5 | 16.5 | 0.6 | 9.0 | 20.5 | 0.8 | 10.0 | 29.0 | 0.8 | 13.0 | 34.0 | 0.8 | 19.0 | 34.0 | 0.8 |
| 0.4700 | 7.5 | 16.5 | 0.6 | 8.0 | 20.5 | 0.6 | 8.0 | 20.5 | 0.6 | 10.0 | 20.5 | 0.8 | 12.0 | 29.0 | 0.8 | 15.0 | 34.0 | 0.8 | 20.0 | 34.0 | 0.8 |
| 0.6800 | 7.0 | 20.5 | 0.6 | 9.0 | 20.5 | 0.8 | 9.0 | 20.5 | 0.8 | 9.0 | 29.0 | 0.8 | 13.0 | 34.0 | 0.8 | 17.0 | 34.0 | 0.8 | 21.0 | 34.0 | 0.8 |
| 1.0000 | 8.0 | 20.5 | 0.6 | 10.0 | 20.5 | 0.8 | 10.0 | 20.5 | 0.8 | 11.0 | 29.0 | 0.8 | 15.0 | 34.0 | 0.8 | 20.0 | 34.0 | 0.8 | 18.0 | 45.0 | 0.8 |
| 1.5000 | 10.0 | 20.5 | 0.8 | 10.0 | 29.0 | 0.8 | 12.0 | 29.0 | 0.8 | 12.0 | 29.0 | 0.8 | 17.0 | 34.0 | 0.8 | 23.0 | 34.0 | 0.8 | 23.0 | 45.0 | 0.8 |
| 2.2000 | 10.0 | 20.5 | 0.8 | 12.0 | 29.0 | 0.8 | 13.0 | 29.0 | 0.8 | 13.0 | 34.0 | 0.8 | 20.0 | 34.0 | 0.8 | 27.0 | 34.0 | 0.8 | | | |
| 3.3000 | 11.0 | 29.0 | 0.8 | 13.0 | 29.0 | 0.8 | 16.0 | 34.0 | 0.8 | 16.0 | 34.0 | 0.8 | 23.0 | 34.0 | 0.8 | | | | | | |
| 4.7000 | 13.0 | 29.0 | 0.8 | 15.0 | 34.0 | 0.8 | 18.0 | 34.0 | 0.8 | 18.0 | 34.0 | 0.8 | 27.0 | 34.0 | 0.8 | | | | | | |
| 6.8000 | 14.0 | 34.0 | 0.8 | 17.0 | 34.0 | 0.8 | 21.0 | 34.0 | 0.8 | 21.0 | 34.0 | 0.8 | | | | | | | | | |
| 10.000 | 16.0 | 34.0 | 0.8 | 18.0 | 34.0 | 0.8 | 22.0 | 34.0 | 0.8 | 22.0 | 34.0 | 0.8 | | | | | | | | | |
| 15.000 | 17.0 | 34.0 | 0.8 | 19.0 | 34.0 | 0.8 | | | | | | | | | | | | | | | |
| 22.000 | 19.0 | 34.0 | 0.8 | 22.0 | 34.0 | 0.8 | | | | | | | | | | | | | | | |

Note: Higher Capacitance / Voltage available on request

METALLISED POLYESTER CAPACITORS – JSS 50204 CPM 08

Type MF : Rectangular, Plastic Case/Epoxy Fill, Radial lead (MPM printing on capacitors - MF)



These capacitors are rectangular in shape and are provided with radial leads for easy PCB mounting and a high packaging density. These are encased in flame retardant Nylon or PBT cases and completely potted in epoxy to provide superior moisture, shock and vibration protection.

Dimensions (Max) in mm

| Voltage | 63V | | | | | 100V | | | | | 160V | | | | | 250V | | | | | |
|---------|-----|------|----|------|-----|------|------|----|------|-----|------|------|----|------|-----|------|------|------|------|-----|---|
| | Val | W | L | H | P | d | W | L | H | P | d | W | L | H | P | d | W | L | H | P | d |
| 0.0010 | 4 | 10.5 | 9 | 7.5 | 0.6 | 4 | 10.5 | 9 | 7.5 | 0.6 | 4 | 10.5 | 9 | 7.5 | 0.6 | 4 | 10.5 | 9 | 7.5 | 0.6 | 4 |
| 0.0015 | 4 | 10.5 | 9 | 7.5 | 0.6 | 4 | 10.5 | 9 | 7.5 | 0.6 | 4 | 10.5 | 9 | 7.5 | 0.6 | 4 | 10.5 | 9 | 7.5 | 0.6 | 4 |
| 0.0022 | 4 | 10.5 | 9 | 7.5 | 0.6 | 4 | 10.5 | 9 | 7.5 | 0.6 | 4 | 10.5 | 9 | 7.5 | 0.6 | 4 | 10.5 | 9 | 7.5 | 0.6 | 4 |
| 0.0033 | 4 | 10.5 | 9 | 7.5 | 0.6 | 4 | 10.5 | 9 | 7.5 | 0.6 | 4 | 10.5 | 9 | 7.5 | 0.6 | 4 | 10.5 | 9 | 7.5 | 0.6 | 4 |
| 0.0047 | 4 | 10.5 | 9 | 7.5 | 0.6 | 4 | 10.5 | 9 | 7.5 | 0.6 | 4 | 10.5 | 9 | 7.5 | 0.6 | 4 | 10.5 | 9 | 7.5 | 0.6 | 4 |
| 0.0068 | 4 | 10.5 | 9 | 7.5 | 0.6 | 4 | 10.5 | 9 | 7.5 | 0.6 | 4 | 10.5 | 9 | 7.5 | 0.6 | 4 | 10.5 | 9 | 7.5 | 0.6 | 4 |
| 0.0100 | 4 | 10.5 | 9 | 7.5 | 0.6 | 4 | 10.5 | 9 | 7.5 | 0.6 | 4 | 10.5 | 9 | 7.5 | 0.6 | 4 | 10.5 | 9 | 7.5 | 0.6 | 4 |
| | 4 | 13 | 9 | 10.2 | 0.6 | 4 | 13 | 9 | 10.2 | 0.6 | 4 | 13 | 9 | 10.2 | 0.6 | 4 | 13 | 9 | 10.2 | 0.6 | 4 |
| 0.0150 | 4 | 10.5 | 9 | 7.5 | 0.6 | 4 | 10.5 | 9 | 7.5 | 0.6 | 4 | 10.5 | 9 | 7.5 | 0.6 | 4 | 10.5 | 9 | 7.5 | 0.6 | 4 |
| | 4 | 13 | 9 | 10.2 | 0.6 | 4 | 13 | 9 | 10.2 | 0.6 | 4 | 13 | 9 | 10.2 | 0.6 | 4 | 13 | 9 | 10.2 | 0.6 | 4 |
| 0.0220 | 4 | 10.5 | 9 | 7.5 | 0.6 | 4 | 10.5 | 9 | 7.5 | 0.6 | 4 | 10.5 | 9 | 7.5 | 0.6 | 4 | 10.5 | 9 | 7.5 | 0.6 | 4 |
| | 4 | 13 | 9 | 10.2 | 0.6 | 4 | 13 | 9 | 10.2 | 0.6 | 4 | 13 | 9 | 10.2 | 0.6 | 4 | 13 | 9 | 10.2 | 0.6 | 4 |
| 0.0330 | 4 | 10.5 | 9 | 7.5 | 0.6 | 4 | 10.5 | 9 | 7.5 | 0.6 | 4 | 10.5 | 9 | 7.5 | 0.6 | 5 | 10.5 | 11 | 7.5 | 0.6 | 4 |
| | 4 | 13 | 9 | 10.2 | 0.6 | 4 | 13 | 9 | 10.2 | 0.6 | 4 | 13 | 9 | 10.2 | 0.6 | 4 | 13 | 9 | 10.2 | 0.6 | 4 |
| 0.0470 | 4 | 10.5 | 9 | 7.5 | 0.6 | 4 | 10.5 | 9 | 7.5 | 0.6 | 4 | 10.5 | 9 | 7.5 | 0.6 | 5 | 10.5 | 11 | 7.5 | 0.6 | 4 |
| | 4 | 13 | 9 | 10.2 | 0.6 | 4 | 13 | 9 | 10.2 | 0.6 | 4 | 13 | 9 | 10.2 | 0.6 | 4 | 13 | 9 | 10.2 | 0.6 | 4 |
| 0.0680 | 4 | 10.5 | 9 | 7.5 | 0.6 | 4 | 10.5 | 9 | 7.5 | 0.6 | 4 | 10.5 | 9 | 7.5 | 0.6 | 5 | 10.5 | 11 | 7.5 | 0.6 | 4 |
| | 4 | 13 | 9 | 10.2 | 0.6 | 4 | 13 | 9 | 10.2 | 0.6 | 4 | 13 | 9 | 10.2 | 0.6 | 4 | 13 | 9 | 10.2 | 0.6 | 4 |
| 0.1000 | 4 | 10.5 | 9 | 7.5 | 0.6 | 2.3 | 6.12 | 7 | 5.0 | 0.5 | 5 | 10.5 | 11 | 7.5 | 0.6 | 6 | 10.5 | 12 | 7.5 | 0.6 | 4 |
| | 4 | 13 | 9 | 10.2 | 0.6 | 4 | 10.5 | 9 | 7.5 | 0.6 | 4 | 13 | 9 | 10.2 | 0.6 | 5 | 10.5 | 11 | 10.2 | 0.6 | 4 |
| | 4 | 13 | 9 | 10.2 | 0.6 | 4 | 13 | 9 | 10.2 | 0.6 | 4 | 13 | 9 | 10.2 | 0.6 | 4 | 13 | 9 | 10.2 | 0.6 | 4 |
| 0.1500 | 4 | 10.5 | 9 | 7.5 | 0.6 | 4 | 10.5 | 9 | 7.5 | 0.6 | 5 | 10.5 | 11 | 7.5 | 0.6 | 5.5 | 18 | 11 | 15.2 | 0.6 | 4 |
| | 4 | 13 | 9 | 10.2 | 0.6 | 4 | 13 | 9 | 10.2 | 0.6 | 4 | 13 | 9 | 10.2 | 0.6 | 4 | 13 | 9 | 10.2 | 0.6 | 4 |
| 0.2200 | 2.3 | 6.12 | 7 | 5.0 | 0.5 | 5 | 10.5 | 11 | 7.5 | 0.6 | 5 | 10.5 | 11 | 7.5 | 0.6 | 5.5 | 18 | 11 | 15.2 | 0.6 | 4 |
| | 5 | 10.5 | 11 | 7.5 | 0.6 | 5 | 13.0 | 11 | 10.2 | 0.6 | 5 | 13.0 | 11 | 10.2 | 0.6 | 5 | 13.0 | 11 | 10.2 | 0.6 | 4 |
| | 5 | 13 | 11 | 10.2 | 0.6 | 5 | 13 | 11 | 10.2 | 0.6 | 5 | 13 | 11 | 10.2 | 0.6 | 5 | 13 | 11 | 10.2 | 0.6 | 4 |
| 0.3300 | 6 | 10.5 | 12 | 7.5 | 0.6 | 6 | 10.5 | 12 | 7.5 | 0.6 | 6 | 18 | 12 | 15.2 | 0.6 | 6 | 18 | 12 | 15.2 | 0.6 | 4 |
| | 5 | 13.0 | 11 | 10.2 | 0.6 | 5.5 | 18 | 11 | 15.2 | 0.6 | 5.5 | 18 | 11 | 15.2 | 0.6 | 5.5 | 18 | 11 | 15.2 | 0.6 | 4 |
| 0.4700 | 2.3 | 6.12 | 7 | 5.0 | 0.5 | 5 | 7 | 10 | 5.0 | 0.6 | 7 | 18 | 14 | 15.2 | 0.6 | 8 | 18 | 15 | 15.2 | 0.8 | 4 |
| | 6 | 10.5 | 12 | 7.5 | 0.6 | 6 | 10.5 | 12 | 7.5 | 0.6 | 6 | 10.5 | 12 | 7.5 | 0.6 | 6 | 10.5 | 12 | 7.5 | 0.6 | 4 |
| | 6 | 13 | 12 | 10.2 | 0.6 | 5.5 | 18 | 11 | 15.2 | 0.6 | 5.5 | 18 | 11 | 15.2 | 0.6 | 5.5 | 18 | 11 | 15.2 | 0.6 | 4 |
| 0.6800 | 6 | 10.5 | 12 | 7.5 | 0.6 | 6 | 7.2 | 10 | 5.0 | 0.6 | 8 | 18 | 15 | 15.2 | 0.8 | 8.5 | 26.5 | 18.5 | 22.5 | 0.8 | 4 |
| | 6.8 | 13 | 12 | 10.2 | 0.6 | 7 | 18 | 14 | 15.2 | 0.6 | 7 | 18 | 14 | 15.2 | 0.6 | 7 | 18 | 14 | 15.2 | 0.6 | 4 |

| Voltage | 63V | | | | | 100V | | | | | 160V | | | | | 250V | | | | |
|---------|-----|------|------|------|-----|------|------|------|------|-----|------|------|------|------|-----|------|------|------|------|-----|
| Val | W | L | H | P | d | W | L | H | P | d | W | L | H | P | d | W | L | H | P | d |
| 1.0000 | 6 | 18 | 12 | 15.2 | 0.6 | 7 | 18 | 14 | 15.2 | 0.6 | 8 | 18 | 15 | 15.2 | 0.8 | 8.5 | 26.5 | 18.5 | 22.5 | 0.8 |
| 1.5000 | 7 | 18 | 14 | 15.2 | 0.6 | 8.5 | 26.5 | 18.5 | 22.5 | 0.8 | 8.5 | 26.5 | 18.5 | 22.5 | 0.8 | 11 | 32 | 20 | 27.5 | 0.8 |
| 2.2000 | 8 | 18 | 15 | 15.2 | 0.8 | 8.5 | 26.5 | 18.5 | 22.5 | 0.8 | 10 | 26.5 | 18.5 | 22.5 | 0.8 | 11 | 32 | 20 | 27.5 | 0.8 |
| 3.3000 | 8.5 | 26.5 | 18.5 | 22.5 | 0.8 | 10 | 26.5 | 18.5 | 22.5 | 0.8 | 11 | 32 | 20 | 27.5 | 0.8 | 15.5 | 32 | 24.5 | 27.5 | 0.8 |
| 4.7000 | 8.5 | 26.5 | 18.5 | 22.5 | 0.8 | 11 | 32 | 20 | 27.5 | 0.8 | 11 | 32 | 20 | 27.5 | 0.8 | | | | | |
| 6.8000 | 10 | 26.5 | 18.5 | 22.5 | 0.8 | 15.5 | 32 | 24.5 | 27.5 | 0.8 | 15.5 | 32 | 24.5 | 27.5 | 0.8 | | | | | |
| 10.000 | 11 | 32 | 20 | 27.5 | 0.8 | 15.5 | 32 | 24.5 | 27.5 | 0.8 | | | | | | | | | | |

| Voltage | 400V | | | | | 630V | | | | | 1000V | | | | |
|---------|------|------|------|------|-----|------|------|------|------|-----|-------|------|------|------|-----|
| Value | W | L | H | P | d | W | L | H | P | d | W | L | H | P | d |
| 0.0010 | 4 | 10.5 | 9 | 7.5 | 0.6 | 4 | 10.5 | 9 | 7.5 | 0.6 | | | | | |
| 0.0015 | 4 | 10.5 | 9 | 7.5 | 0.6 | 4 | 10.5 | 9 | 7.5 | 0.6 | | | | | |
| 0.0022 | 4 | 10.5 | 9 | 7.5 | 0.6 | 4 | 10.5 | 9 | 7.5 | 0.6 | | | | | |
| 0.0033 | 4 | 10.5 | 9 | 7.5 | 0.6 | 4 | 10.5 | 9 | 7.5 | 0.6 | | | | | |
| 0.0047 | 4 | 10.5 | 9 | 7.5 | 0.6 | 4 | 10.5 | 9 | 7.5 | 0.6 | | | | | |
| 0.0068 | 4 | 10.5 | 9 | 7.5 | 0.6 | 4 | 10.5 | 9 | 7.5 | 0.6 | | | | | |
| 0.0100 | 4 | 10.5 | 9 | 7.5 | 0.6 | 4 | 10.5 | 9 | 7.5 | 0.6 | 5.5 | 18.0 | 11 | 15.2 | 0.6 |
| | 4 | 13 | 9 | 10.2 | 0.6 | 4 | 13 | 9 | 10.2 | 0.6 | | | | | |
| 0.0150 | 4 | 10.5 | 9 | 7.5 | 0.6 | 5 | 10.5 | 11 | 7.5 | 0.6 | 5.5 | 18.0 | 11 | 15.2 | 0.6 |
| | 4 | 13 | 9 | 10.2 | 0.6 | 5 | 13.0 | 11 | 10.2 | 0.6 | | | | | |
| 0.0220 | 5 | 10.5 | 11 | 7.5 | 0.6 | 6 | 13 | 12 | 10.2 | 0.6 | 7 | 18 | 14 | 15.2 | 0.6 |
| | 4 | 13 | 9 | 10.2 | 0.6 | | | | | | | | | | |
| 0.0330 | 5 | 10.5 | 11 | 7.5 | 0.6 | 6 | 13 | 12 | 10.2 | 0.6 | 8.5 | 26.5 | 18.5 | 22.5 | 0.8 |
| | 5 | 13.0 | 11 | 10.2 | 0.6 | | | | | | | | | | |
| 0.0470 | 6 | 13 | 12 | 10.2 | 0.6 | 6 | 13 | 12 | 10.2 | 0.6 | 8.5 | 26.5 | 18.5 | 22.5 | 0.8 |
| 0.0680 | 5.5 | 18 | 11 | 15.2 | 0.6 | 8 | 18 | 15 | 15.2 | 0.8 | 8.5 | 26.5 | 18.5 | 22.5 | 0.8 |
| 0.1000 | 7 | 18 | 14 | 15.2 | 0.6 | 8 | 18 | 15 | 15.2 | 0.8 | 10 | 26.5 | 18.5 | 22.5 | 0.8 |
| 0.1500 | 8 | 18 | 15 | 15.2 | 0.8 | 8.5 | 26.5 | 18.5 | 22.5 | 0.8 | 11 | 32 | 20 | 27.5 | 0.8 |
| 0.2200 | 8.5 | 26.5 | 18.5 | 22.5 | 0.8 | 10 | 26.5 | 18.5 | 22.5 | 0.8 | 11 | 32 | 20 | 27.5 | 0.8 |
| 0.3300 | 8.5 | 26.5 | 18.5 | 22.5 | 0.8 | 11 | 32 | 20 | 27.5 | 0.8 | 15.5 | 32 | 24.5 | 27.5 | 0.8 |
| 0.4700 | 8.5 | 26.5 | 18.5 | 22.5 | 0.8 | 15.5 | 32 | 24.5 | 27.5 | 0.8 | 17 | 41.5 | 29 | 37.5 | 0.8 |
| 0.6800 | 11 | 32 | 20 | 27.5 | 0.8 | 15.5 | 32 | 24.5 | 27.5 | 0.8 | 17 | 41.5 | 29 | 37.5 | 0.8 |
| 1.0000 | 11 | 32 | 20 | 27.5 | 0.8 | 14 | 44 | 24 | 37.5 | 0.8 | 17 | 41.5 | 29 | 37.5 | 0.8 |
| 1.5000 | 15.5 | 32 | 24.5 | 27.5 | 0.8 | | | | | | | | | | |
| 2.2000 | 15.5 | 32 | 24.5 | 27.5 | 0.8 | | | | | | | | | | |

*Tolerance codes: ±20% - M, ±10% - K, ±5% - J, ±2.5% - H, ±2% - G, ±1% - F, ±0.5% - E

Registered Office and Factory:

Advance Components and Instruments Pvt Ltd

3A-3A/1, Belavadi Industrial Area ,Mysore – 570018 KARNATAKA

Phone: +91 821 2402301 / 2402307 /2403058 Mobile & WhatsApp: +91 8073111025

E-mail : advcaps@gmail.com / enquiries@advancecapacitors.com Website: www.advance-capacitors.com